

prijslijst Oktober 2010



- SOUND REINFORCEMENT

Upturned T series

MODEL		€ (excl BTW)
PSUT8TE <i>New!</i>	Stackable Hybrid-dispersion Sound Column Top Element - RMS Power: 400 W - Musical Power: 800 W Impedance: 16 Ohm - Max SPL (@ 1m): 129 dB - Max SPL (@ 16m): 107 dB - Transducers: 8x4" full range	895.00
PSUT8AE <i>New!</i>	Stackable Wide-dispersion Sound Column Additional Element - RMS Power: 400 W - Musical Power: 800 W Impedance: 16 Ohm - Max SPL (@ 1m): 128 dB - Max SPL (@ 16m): 105 dB - Transducers: 8x4" full range	805.00
PSUTBASE/A <i>New!</i>	Active Professional Subwoofer, base for 1 PSUT8TE or 1 PSUT8TE + 1PSUT8AE - Class D Digital Amplifier Amplifier Power RMS: 800+800 W - DSP on board: 24 bit, 96 kHz (4 presets) - Max SPL (@ 1m): 132 dB Transducers: 1x12" Neodymium	1905.00
PSUT1 <i>New!</i>	Single Module for stacked clusters (up to 4 elements) - RMS Power: 50 W - Musical Power: 100 W Impedance: 16 Ohm - Max SPL (@ 1m): 113 dB - Transducers: 1x4" full range Standard colours: black or white. It can be customized in any RAL colour by paying a 15% overcharge	235.00
PSUTS <i>New!</i>	High efficiency ultra-compact Suspendable Subwoofer - RMS Power: 160 W - Musical Power: 320 W Impedance: 8 Ohm - Max SPL (@ 1m): 120 dB - Transducers: 2x6" Standard colours: black or white. It can be customized in any RAL colour by paying a 15% overcharge	465.00

Upturned T series Accessories

STD-WUT8	Wall bracket for vertical support of 1 PSUT8TE or PSUT8AE loudspeaker system	72.00
STD-WUT1	Wall bracket for vertical support of 1 or 2 PSUT1 speakers (180° Hor. and Vert. rotation)	19.00
STD-PSUT124	Flying bracket for 2 or 4 PSUT1 speakers (side-by-side or stacked)	61.00
STD-PSUTS	Flying bracket for one PSUTS subwoofer	65.00
PS-ST125	Adjustable-height stand holder for one PSUT8TE loudspeaker system	86.00
PSUT8-AC	Adapter flange for a PSUT8TE loudspeaker system to a PS-ST125 three-legged stand	120.00
PS-ST70	Stand holder for spacing a PSUT8TE speaker from a PSUTBASE/A sub (height: 70 cm)	327.00
TRA-PSUT1	30W (16 Ohm)/100V line transformer for the connection of a PSUT1 speaker to 100V constant voltage lines	63.00
TRA-PSUTS	150W (8 Ohm)/100V line transformer for the connection of a PSUTS subwoofer to 100V constant voltage lines	81.00
UT8-COVER	Protection enclosure for 1 PSUT8TE or PSUT8AE loudspeaker system	103.00
UTBASE/A-COV	Protection enclosure for one PSUTBASE/A subwoofer	121.00

FORTY series

4008	Professional Loudspeaker system - Power handling RMS: 250 W - Power handling Music: 500 W Impedance: 8 Ohm - Max SPL (@ 1m): 126 dB - Transducers: LF 1x8", HF 1x1" Mylar	389.00
4010MH	Professional Loudspeaker system - Power handling RMS: 300 W - Power handling Music: 600 W Impedance: 8 Ohm - Max SPL (@ 1m): 130 dB - Transducers: LF 1x10" Neodymium, HF 1x1" Mylar - AWSH®	589.00
4012MH	Professional Loudspeaker system - Power handling RMS: 400 W - Power handling Music: 800 W Impedance: 8 Ohm - Max SPL (@ 1m): 132 dB - Transducers: LF 1x12" Neodymium, HF 1x1" Mylar - AWSH®	729.00
4015MH	Professional Loudspeaker system - Power handling RMS: 450 W - Power handling Music: 900 W Impedance: 8 Ohm - Max SPL (@ 1m): 133 dB - Transducers: LF 1x15" Neodymium, HF 1x1" Mylar - AWSH®	819.00
4030MH	Professional Loudspeaker system - Power handling RMS: 900 W - Power handling Music: 1800 W Impedance: 8 Ohm - Max SPL (@ 1m): 136 dB - Transducers: LF 2x15" Neodymium, HF 1x1" Titanium - AWSH®	1264.00
40SW15	Professional Subwoofer - Power handling RMS: 600 W - Power handling Music: 1200 W Impedance: 8 Ohm - Max SPL (@ 1m): 133 dB - Transducers: 1x15"	766.00
40SW18	Professional Subwoofer - Power handling RMS: 700 W - Power handling Music: 1400 W Impedance: 8 Ohm - Max SPL (@ 1m): 134 dB - Transducers: 1x18"	894.00

Active FORTY series with dsp

4012MH/A	Active Professional Loudspeaker system - Class D Digital Amplifier - Amplifier Power RMS: 500 W DSP on board: 24 bit, 96 kHz (2 presets) - Max SPL (@ 1m): 132 dB Transducers: LF 1x12" Neodymium, HF 1x1" Mylar - AWSH®	1234.00
4015MH/A	Active Professional Loudspeaker system - Class D Digital Amplifier - Amplifier Power RMS: 500 W DSP on board: 24 bit, 96 kHz (2 presets) - Max SPL (@ 1m): 133 dB Transducers: LF 1x15" Neodymium, HF 1x1" Mylar - AWSH®	1325.00
4030MH/A	Active Professional Loudspeaker system - Class D Digital Amplifier - Amplifier Power RMS: 500 W DSP on board: 24 bit, 96 kHz (2 presets) - Max SPL (@ 1m): 136 dB Transducers: LF 2x15" Neodymium, HF 1x1" Titanium - AWSH®	1776.00
40SW15/A	Active Professional Subwoofer - Class D Digital Amplifier - Amplifier Power RMS: 500 W DSP on board: 24 bit, 96 kHz (2 presets) - Max SPL (@ 1m): 133 dB - Transducers: 1x15"	1283.00
40SW18/A	Active Professional Subwoofer - Class D Digital Amplifier - Amplifier Power RMS: 500 W DSP on board: 24 bit, 96 kHz (2 presets) - Max SPL (@ 1m): 134 dB - Transducers: 1x18"	1402.00



FORTY series Accessories

STD-4008	Horizontal flying bracket for Forty 4008 loudspeaker system + 10MA adapter flange	50.00
STD-4010	Horizontal flying bracket for Forty 4010MH loudspeaker system + 10MA adapter flange	61.00
STD-4012	Horizontal flying bracket for Forty 4012MH loudspeaker system + 10MA adapter flange	65.00
STD-4015	Horizontal flying bracket for Forty 4015MH loudspeaker system + 10MA adapter flange	68.00
STD-WALL	Wall bracket for vertical support of a Forty Series loudspeaker system	64.00
PS-GN	Hook for the attachment to a rigging system	10.00
PS-OC6	Kit of three 10MA eyelets for vertical hanging of one Forty series loudspeaker system	28.00
PS-ST100	Adjustable-height stand holder for subwoofer-upper module connection	39.00
PS-ST125	Adjustable-height three-legged stand for Forty upper modules	86.00



Amplifiers with dsp

PSDSP2000	Stereo Power Amplifier - Power RMS: 2x1000 W (@4 Ohm), 2x650 W (@8 Ohm) DSP on board: 24 bit, 48 kHz - Frequency response: 20÷20k Hz (± 0.5 dB) - SNR > 90 dB Damping Factor > 500 @ 8 Ohm, 1 kHz - Remote PC Network Control	973.00
PSDSP2600	Stereo Power Amplifier - Power RMS: 2x1300 W (@4 Ohm), 2x850 W (@8 Ohm) DSP on board: 24 bit, 48 kHz - Frequency response: 20÷20k Hz (± 0.5 dB) - SNR > 90 dB Damping Factor > 500 @ 8 Ohm, 1 kHz - Remote PC Network Control	1103.00
PSDSP3400	Stereo Power Amplifier - Power RMS: 2x1700 W (@4 Ohm), 2x1000 W (@8 Ohm) DSP on board: 24 bit, 48 kHz - Frequency response: 20÷20k Hz (± 0.5 dB) - SNR > 90 dB Damping Factor > 500 @ 8 Ohm, 1 kHz - Remote PC Network Control	1389.00

Professional Series Amplifiers

PS1000	Stereo Power Amplifier - Power RMS: 2x500 W (@4 Ohm), 2x280 W (@8 Ohm)	508.00
PS1600	Stereo Power Amplifier - Power RMS: 2x800 W (@4 Ohm), 2x450 W (@8 Ohm)	627.00
PS2000	Stereo Power Amplifier - Power RMS: 2x1000 W (@4 Ohm), 2x650 W (@8 Ohm)	833.00
PS2600	Stereo Power Amplifier - Power RMS: 2x1300 W (@4 Ohm), 2x850 W (@8 Ohm)	1028.00
PS3400	Stereo Power Amplifier - Power RMS: 2x1700 W (@4 Ohm), 2x1000 W (@8 Ohm)	1194.00
PS650-F	Four-Channels Power Amplifier - Power RMS: 4x650 W (@4 Ohm), 4x300 W (@8 Ohm)	1210.00

Processors

PS266	Digital Speaker Management System - Ways: 2 Input, 6 Output - Frequency response: 15÷20k Hz (±0.25 dB) Crossover: up to 48 dB/oct - EQ type: parametric, Bell or shelving - EQ Gain: ± 15 dB - Delay Step: 21µs Limiter - Polarity Control - Storage memories: 60 - Remote Control by PC through specific Software	699.00
--------------	--	---------------



PS family



• CONTROLLED RADIATION

Double Array Series®

AS6	Professional Double Array Speaker - Power handling RMS: 350 W - Power handling Music: 700 W Impedance: 8 Ohm - Max SPL (@ 1m): 124 dB - Transducers: LF 6x5", HF 1x1" Titanium	1076.00
AS60	Professional Double Array Speaker - Power handling RMS: 2x900 W - Power handling Music: 2x1800 W Impedance: 8+8 Ohm - Max SPL (@ 1m): 130 dB - Transducers: LF 36x5", HF 2x1" Titanium	4353.00
AS120	Professional Double Array Stereo Speaker - Power handling RMS: 2x1300 W - Power Music: 2x2600 W Impedance: 8+8 Ohm - Max SPL (@ 1m): 132 dB - Transducers: LF 64x5", HF 2x1" Titanium	6061.00
AS180	Professional Double Array Stereo Speaker - Power handling RMS: 2x1400 W - Power Music: 2x2800 W Impedance: 8+8 Ohm - Max SPL (@ 1m): 134 dB - Transducers: LF 12x10" Neodymium, HF 4x1" Titanium	6531.00

Bone Conduction Series®

J-UpMST	Vibrating Dance Floor Module - Dimensions (WxHxD): 1000x190x1000 mm - with Steel surface tramp	887.00
J-UpMAL	Vibrating Dance Floor Module - Dimensions (WxHxD): 1000x190x1000 mm - with Aluminium surface tramp	830.00
J-UpDSP	Electronic Control Management System with DSP on board	1309.00
J-UpPM	Horn-loaded Electrodynamic Transducer	1460.00

Controllers

AMCL2	Professional Multi-band Electronic Limiter - Automatic level control system	1423.00
DP60/120	Dynamic Processor specific for Double Array Series mod. AS60/AS120	1116.00
DP180	Dynamic Processor specific for Double Array Series mod. AS180	1045.00




AS6



AS60



AS120

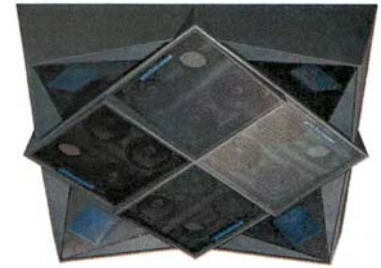

AS180

• ACOUSTIC RESEARCH

Omni-directional Noise Source

JA12	Omni-directional Noise Source - Power handling RMS: 360 W - Power handling Peak: 1080 W Impedance: 6+6 Ohm - Max SPL (@ 1m): 99 dB - Transducers: 12x5" Double Cone Uniform dispersion through the solid angle around the source - The noise source is designed in compliance with the minimum directivity regulations of UNI EN ISO 3382:2001 and UNI EN ISO 140-3:2006	1363.00
JA1060	Switching Class D Power Amplifier with Pink Noise Generator - Power RMS (@12 Ohm): 1100 W It can be integrated with a wireless distance control kit	1960.00
JAGR01 <i>New!</i>	Portable Pink Noise Generator - Selectable Output Level, Max Output Level: 0 dBu Current Power Supply: 12 VDC	408.00



JA12



Omni-directional Noise Source Accessories

PS-ST125	Adjustable-height three-legged stand for JA12 loudspeaker system	86.00
JA-BT	Battery supply kit for JA1060 amplifier	1190.00
JA-RC	Remote control kit for JA1060 amplifier	366.00
FC-JA12	Professional flight-case made of phenolyc plywood with foam inside It is dedicated to JA12 omni-directional noise source	490.00
FC-JA1060	Professional flight-case made of phenolyc plywood with foam inside and equipped with castors It is dedicated to JA1060 amplifier and prearranged for PS-ST100 stand holder	945.00
FCJA-BT	Professional flight-case made of phenolyc plywood with foam inside It is dedicated to JA-BT battery supply kit - The package includes 4 batteries	947.00

Prijzen in euro excl BTW

Prijswijzigingen voorbehouden.

Op alle leveringen zijn de verkoopvoorwaarden van toepassing zoals deze gedeponerd zijn bij de kamer van koophandel te Enschede no: 06075643